

Roof-mounted Fan ***“Pagoda top”***


- ***Superior Quality***
- ***Powerful Performance***
- ***Excellent Value***
- ***In Stock***

Maintenance-free

- Designed for continuous operation of powerful heat removal
- Use of radial fans guarantees extremely high air flow

Easy installation

- Roof-mounted fan comes complete with mounting hardware

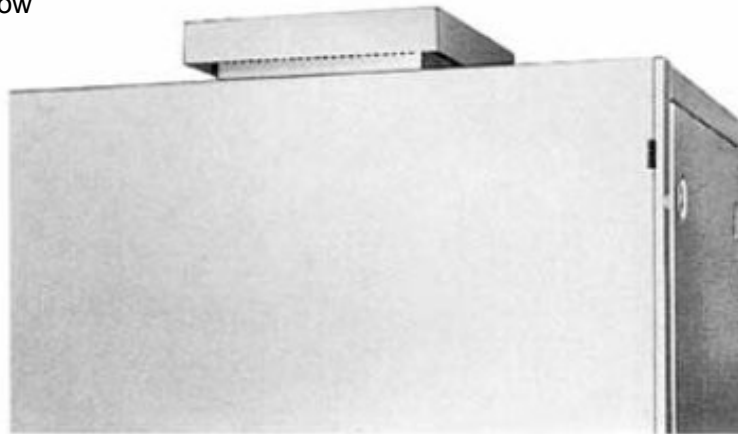


- Temperature range: -13 to +140 °F
- Powder-coated RAL 7035, textured finish

Performance

- Air exhausts to all 4 sides
- Available in two sizes



Fan motors UL listed

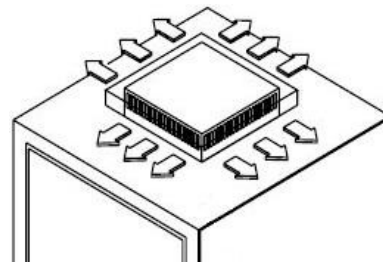


häwa 3148 roof-mounted fan “Pagoda top” Sheet steel powder-coated RAL 7035


		Voltage	Max. Power	Amp Draw	Unimpeded Flow @ 60Hz	Part Number
Type 300	Roof-mounted Fans	115V _{AC}	70 W	0.61 A	220 cfm	3148-0300-01-17
		230V _{AC}	51 W	0.29 A	253 cfm	3148-0300-02-27
	Inlet filter*					3159-9292-00-73
	Repl. Pads (box of 10)					3140-9350-10-03
Type 600	Roof-mounted Fan	115V _{AC}	80 W	0.70 A	585 cfm	3148-0600-01-17
		230V _{AC}	80 W	0.35 A	595 cfm	3148-0600-02-17
		24V _{DC}	55 W	2.6 A	709 cfm	3148-0600-24-17
	Inlet filter* (recomm. Qty: 2)					3159-9292-00-73
Repl. Pads (box of 10)					3140-9350-10-03	

* The recommended inlet filter is the häwa 3159-Series 12 x 12 louver with filter.
For the 'Type 600' roof-mounted fans it is recommended to use two of these inlet filters.

Even though the fan is designed for continuous operation, it can also be controlled by a thermostat, if desired. Please refer to häwa tamper-proof or adjustable thermostats with normally open (NO) contact.

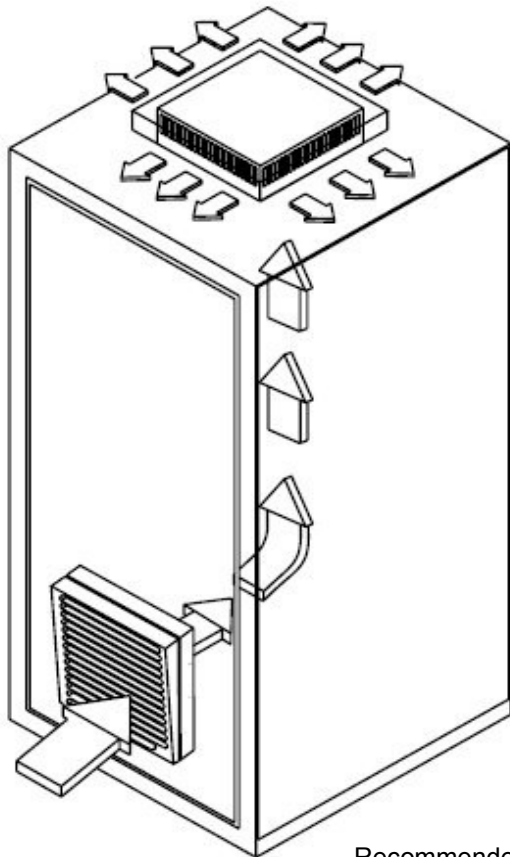

Recommended installation

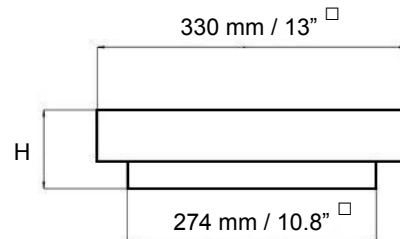

Height H: 77 mm / 3" (Type 300)
155 mm / 6" (Type 600)

Cut-out

